




## Solar Modules MONOCRYSTALLINE

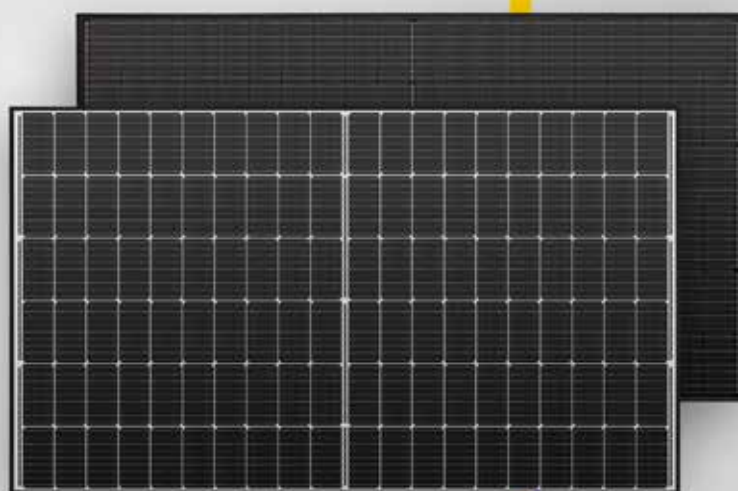

**Mono S3**

OPTIONAL:  
+ WHITE BACKSHEET  
+ BLACK BACKSHEET

**9BB**



### **Mono S3** - Halfcut

365 W ▪ 370 W ▪ 375 W

- Half cell modules
- High efficiency, high safety, high reliability
- High performance under low light conditions
- Resistant to environmental influences: Passed salt mist & ammonia test
- 9-busbar-technology - PID Free
- German warranty

# Mono S3 - Halfcut

## Electrical data under STC (Standard Test Conditions: 1000 W/m<sup>2</sup>, 25 °C, AM 1.5)

|                               |           |         |         |         |
|-------------------------------|-----------|---------|---------|---------|
| Rated power                   | $P_{max}$ | 365 W   | 370 W   | 375 W   |
| Sorting limits of performance |           | 0/+3 %  | 0/+3 %  | 0/+3 %  |
| Voltage                       | $U_{MPP}$ | 34.20 V | 34.40 V | 34.60 V |
| Open circuit voltage          | $U_{OC}$  | 40.70 V | 40.90 V | 41.10 V |
| Current                       | $I_{MPP}$ | 10.68 A | 10.76 A | 10.84 A |
| Short-circuit current         | $I_{SC}$  | 11.43 A | 11.52 A | 11.60 A |
| Efficiency                    |           | 20.00 % | 20.30 % | 20.60 % |

## Temperature data

|                                    |                 |                   |
|------------------------------------|-----------------|-------------------|
| Operating temperature              |                 | - 40° C ~ + 85° C |
| Nominal operating cell temperature |                 | 45 ± 2° C         |
| Power temperature coefficient      | $T_K (P_{MPP})$ | -0.390 %/K        |
| Voltage temperature coefficient    | $T_K (U_{OC})$  | -0.295 %/K        |
| Current temperature coefficient    | $T_K (I_{SC})$  | 0.039 %/K         |

## Further information

|                                    |                                                                                  |                                                                                     |
|------------------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Number of cells                    | 120 monocrystalline half cells (6 x 20)                                          |  |
| Size of cell                       | 166 x 83 mm                                                                      |                                                                                     |
| Module dimensions                  | 1755 x 1038 x 35 mm                                                              |                                                                                     |
| Type of Frame                      | Anodized aluminium alloy                                                         |                                                                                     |
| Max. system voltage                | 1500 V                                                                           |                                                                                     |
| Reverse current loading capability | 20 A                                                                             |                                                                                     |
| Glass thickness                    | 3.2 mm                                                                           |                                                                                     |
| Weight                             | 19.5 kg                                                                          |                                                                                     |
| Module connection                  | MC4 compatible, 4.0 mm <sup>2</sup> , cable length: (+) ≥ 1200 mm, (-) ≥ 1200 mm |                                                                                     |
| Junction box rating                | IP68                                                                             |                                                                                     |
| Allowable Hail Load                | 25 mm iceball with velocity of 23 m/s                                            |                                                                                     |
| Snow load                          | 5400 Pa $\hat{=}$ 550 kg/m <sup>2</sup>                                          |                                                                                     |


15-year product warranty, 25-year linear performance warranty according to our additional warranty conditions for solar power modules of the "Mono S3" product series, which we will gladly send you.

Subject to technical modifications with corresponding follow-up certifications. Errors excepted. Illustration similar.


## Packaging Specifications

| Truck                    |                  |
|--------------------------|------------------|
| Dimension pallet (L/W/H) | 180/113/117.5 cm |
| Weight pallet            | approx. 635 kg   |
| Modules per pallet       | 30               |
| Modules per truck        | 840              |

| Shipment                       |                  |
|--------------------------------|------------------|
| Dimension pallet (L/W/H)       | 180/113/117.5 cm |
| Weight pallet                  | approx. 635 kg   |
| Modules per pallet             | 30               |
| Modules per container [40' HC] | 780              |



### Mono S3 - Halfcut (half cell module)

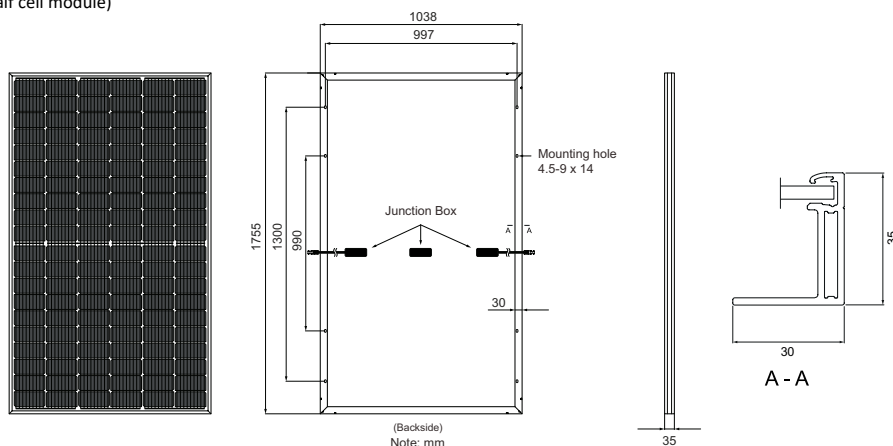

**Note:**  
Ensure correct polarity!

Your specialist dealer:

**SF Solar Fabrik GmbH & Co. KG**  
Im Gewerbegebiet 12  
63831 Wiesen  
Germany

Phone: +49 (0)6096 9 700-790  
Fax: +49 (0)6096 9 700-728  
Mail: [info@solar-fabrik.de](mailto:info@solar-fabrik.de)  
Web: [www.solar-fabrik.de](http://www.solar-fabrik.de)