




## POWER WALLBOX 11.0

### SMART EV-CHARGER

#### HIGH EFFICIENCY

- Intelligent and configurable load management
- Keyswitch for easy program selection
- Operating states are visualized via LED display
- Visualization via web interface
- Integrated DC leakage current detection requires only RCD type A
- Connection cable with type 2 plug
- Identification and load activation via RFID card

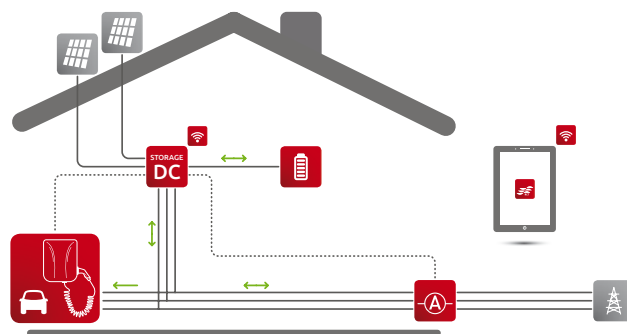

## POWER WALLBOX

11.0

11.0

### GENERAL

Grid connection	3-phase 400 V	
Nominal voltage	400 V	
Rated current	16 A	
Maximum charge	11 kW	
Connector type 2	4 m cable twisted	8 m cable straight
Protective switchgear	LS 16 A 3p	
DC leakage current detection	electronic 6 mA	
Conductor cross section of supply line	min. 2,5 mm <sup>2</sup> / max. 10mm <sup>2</sup>	
Power Storage interface	LAN	
RFID	integrated	
Dimensions (height x width x depth)	477x400x164 mm	
Weight	9 kg	
Complementary functions	web server, load recording, energy meter, load management, operating states via LED display	
<b>SECURITY STANDARDS</b>		
Safety class	II	
IP degree of protection	IP44	
Certificates	IEC 61851-1, IEC 61851-22	
Warranty	2 years	